




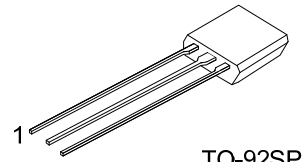
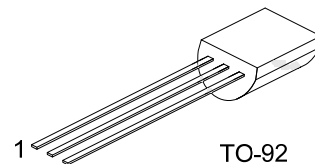


**DTC114E****NPN SILICON TRANSISTOR****NPN DIGITAL TRANSISTOR
(BUILT-IN BIAS RESISTORS)****■ FEATURES**


- * Built-in bias resistors that implies easy ON/OFF applications.
- * The bias resistors are thin-film resistors with complete isolation to allow negative input.

■ EQUIVALENT CIRCUIT**SOT-23**
(JEDEC TO-236)**SOT-323****SOT-523****SOT-723****TO-92SP****TO-92****■ ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
DTC114EL-AE3-R	DTC114EG-AE3-R	SOT-23	I	G	O	Tape Reel
DTC114EL-AL3-R	DTC114EG-AL3-R	SOT-323	I	G	O	Tape Reel
DTC114EL-AN3-R	DTC114EG-AN3-R	SOT-523	I	G	O	Tape Reel
DTC114EL-AQ3-R	DTC114EG-AQ3-R	SOT-723	I	G	O	Tape Reel
DTC114EL-T92-B	DTC114EG-T92-B	TO-92	G	O	I	Tape Box
DTC114EL-T92-K	DTC114EG-T92-K	TO-92	G	O	I	Bulk
DTC114EL-T9S-B	DTC114EG-T9S-B	TO-92SP	G	O	I	Tape Box
DTC114EL-T9S-K	DTC114EG-T9S-K	TO-92SP	G	O	I	Bulk

Note: Pin Assignment: I: IN G: GND O: OUT

DTC114EG-AE3-R



(1)Packing Type

(2)Package Type

(3)Green Package




(1) B: Tape Box, K: Bulk, R: Tape Reel

(2) AE3: SOT-23, AL3: SOT-323, AN3: SOT-523

AQ3: SOT-723, T92: TO-92, T9S: TO-92SP

(3) G: Halogen Free and Lead Free, L: Lead Free

MARKING

SOT-23 / SOT-323 SOT-523 / SOT-723	TO-92	TO-92SP
 CB4E E: Lead Free E: Halogen Free	 UTC C 1 1 4 E L: Lead Free G: Halogen Free Date Code	 UTC TC114E L: Lead Free G: Halogen Free Date Code

■ **ABSOLUTE MAXIMUM RATINGS** ($T_A=25^{\circ}\text{C}$, unless others specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage		V_{CC}	50	V
Input Voltage		V_{IN}	-10 ~ +40	V
Output Current		I_{OUT}	100	mA
Power Dissipation	SOT-23/SOT-323	P_D	200	mW
	SOT-523		150	
	SOT-723		100	
	TO-92		625	
	TO-92SP		550	
Junction Temperature		T_J	+150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.





Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^{\circ}\text{C}$, unless others specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	$V_{IN(OFF)}$	$V_{CC}=5\text{V}$, $I_{OUT}=100\mu\text{A}$			0.5	V
	$V_{IN(ON)}$	$V_{OUT}=0.3\text{V}$, $I_{OUT}=10\text{mA}$	3			V
Output Voltage	$V_{OUT(ON)}$	$I_{OUT}/I_{IN}=10\text{mA}/0.5\text{mA}$		0.1	0.3	V
Input Current	I_{IN}	$V_{IN}=5\text{V}$			0.88	mA
Output Current	$I_{OUT(OFF)}$	$V_{CC}=50\text{V}$, $V_{IN}=0\text{V}$			0.5	μA
DC Current Gain	h_{FE}	$V_{OUT}=5\text{V}$, $I_{OUT}=5\text{mA}$	30			
Input Resistance	R_1		7	10	13	K Ω
Resistor Ratio	R_2/R_1		0.8	1	1.2	
Transition Frequency	f_T	$V_{CE}=10\text{V}$, $I_E=-5\text{mA}$, $f=100\text{MHz}$ (Note)		250		MHz

Note: Transition frequency of the device.

TYPICAL CHARACTERISTICS

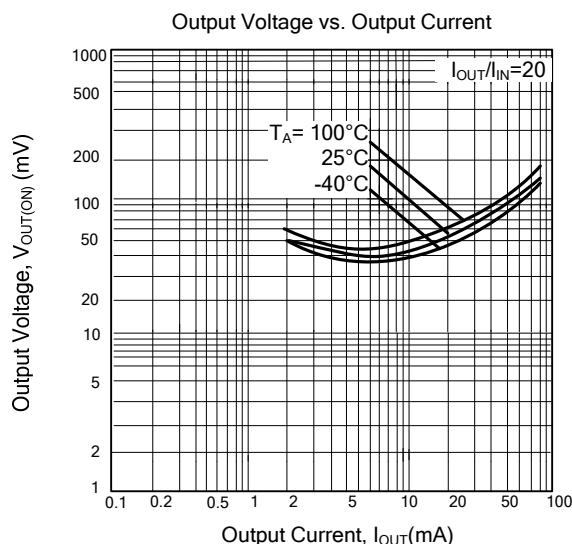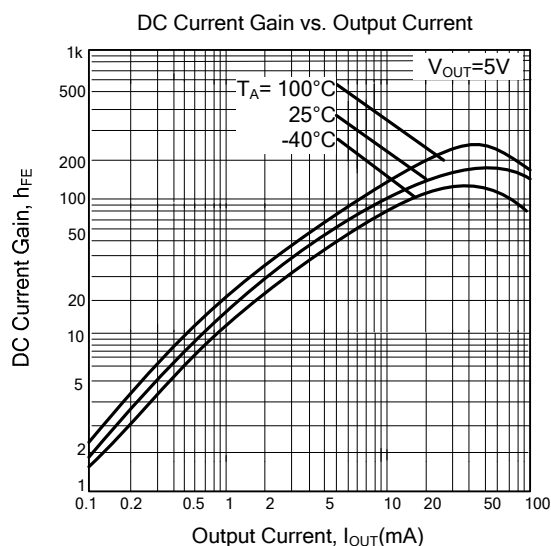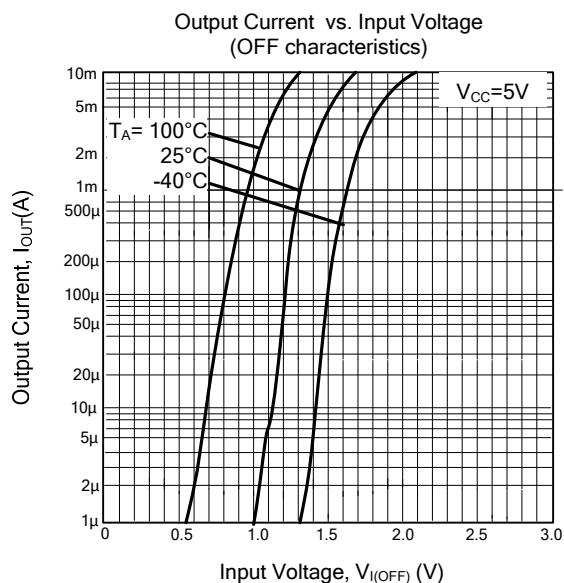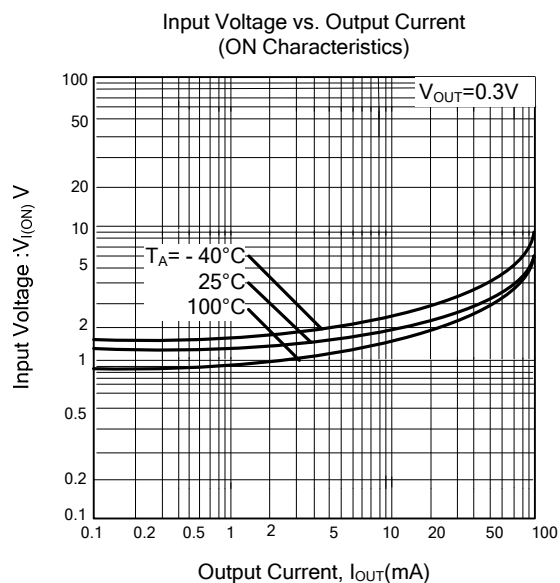

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.